

## Illuminated Anti-Vandal Push Button Switch S2GQ Series 16mm Diameter



### SPECIFICATIONS

- Electrical Rating: 3A 250VAC
- Mechanical life: Over 200000 cycles
- Electrical life: Over 50000 cycles
- Contact resistance: <math><50 M\Omega</math>
- Insulation resistance: >1000 M $\Omega$
- High voltage resistance: >2000VAC 1 min.
- Ambient temperature: -20~55°C
- IP Degree: IP67,IK09
- Torque: 5~14Nm
- Operation Pressure: 2.5~4N
- LED life: over 40000 hours

### MATERIALS



- Body/Button: Stainless Steel
- Base: PBT
- Contact: Silver alloy

### HOW TO ORDER

<h2>S2GQ</h2> <p>Series</p>	<h2>F</h2> <p>Switch Shape</p>  <p>F Flat H High</p>	<h2>11</h2> <p>Contact Configuration</p>  <p>11 SPDT 22 DPDT</p>	<h2>□</h2> <p>Function</p>  <p>□ MOMENTARY Z Latching (□: no letter)</p>	<h2>D</h2> <p>LED Type</p>  <p>D DOT E Ring S Stainless Steel No Light</p>	<h2>R</h2> <p>LED Color</p>  <p><b>R</b> Red <b>G</b> Green <b>Y</b> Yellow <b>O</b> Orange <b>B</b> Blue <b>W</b> White <b>RG</b> Red/Green <b>RB</b> Red/Blue <b>RW</b> Red/White <b>S</b> Stainless Steel</p>	<h2>24V</h2> <p>LED Voltage</p>  <p>6V VDC 12V VDC 24 VDC 48V VDC 110V VDC 220 VDC S Stainless Steel</p>
-----------------------------	--	--	--	--	--	--

### Anti-Vandal Push Button Switch LAS2GQ Series

#### Switch Configuration

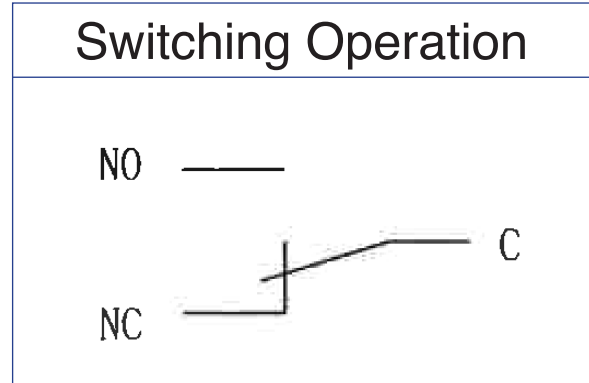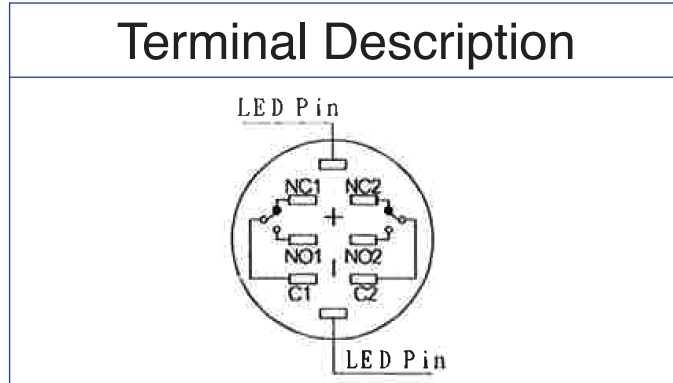

#### Dimension of LAS2GQ Series

