



THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO CW INDUSTRIES INCORPORATED AND ITS AFFILIATES. IT MAY NOT BE DISCLOSED TO ANYONE, OTHER THAN CW INDUSTRIES PERSONNEL, WITHOUT WRITTEN AUTHORIZATION FROM CW INDUSTRIES INCORPORATED, SOUTHAMPTON, PENNSYLVANIA USA.

DIMENSIONS IN INCHES (MILLIMETERS)  
DO NOT SCALE DRAWING .....

Dwg. No. **CRTP331A7M9-E**

REVISIONS	0	New drawing. DGW 1/19/21	JAN 19 2021

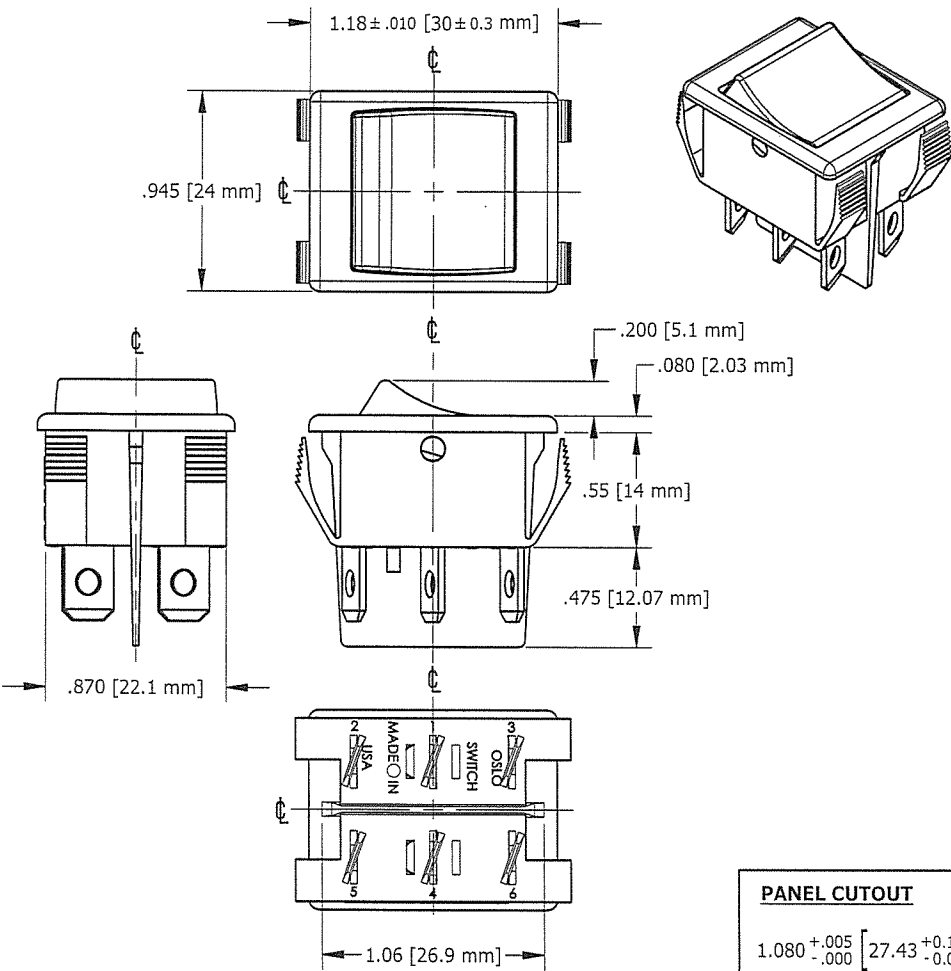

**Materials:**

- Housing: Color - Matte Black
- Actuator: Color - White
- Actuator Style: Curve
- Contacts: Fine Silver
- Epoxy Seal

**Terminals/Contacts:**

Style A - 1/4" Quick connect

**Dielectric strength:** 1250 Volts (live parts to ground)

**Life:** 35,000 Operations at maximum rating


**Insulation resistance:** 5 megohms

**Mechanical operation:** 100,000 Mechanical operations

**Load rating:** 20A 125/250 VAC, 3/4 HP 125/250 VAC,  
14A 14VDC



Circuit	Switching	
331	Progressive single pole switch with three independent "ON" positions. Terminal Connections (with external jumper wired by user)	<div style="display: flex; justify-content: space-around;"> <div style="text-align: center;"> <p>1 and 3</p> </div> <div style="text-align: center;"> <p>1 and 6</p> </div> <div style="text-align: center;"> <p>1 and 5</p> </div> </div>

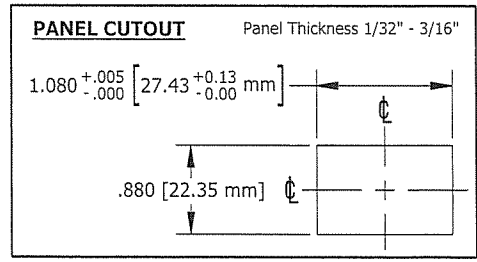

**OSLO SWITCH**  
**CW Industries**  
A Unit of Electro Switch Corp.

Title:  
**3-POSITION PROGRESSIVE ROCKER SWITCH**

**TOLERANCES UNLESS OTHERWISE SPECIFIED**

2 Place Decimal ± .010	METRIC
3 Place Decimal ± .005	1 Place Dec. ± .25mm
Angles ..... ± 1°	2 Place Dec. ± .13mm

Made for: CW/OSLO  
Drawn by: DGW 1/19/2021

Division: SWITCH

Checked by: *DW 1/19/21*  
Approval: *DW 1/19/21*

Dwg. No. CRTP331A7M9-E

1 2 3 4 5 6 7 8 9 10