

# CRTL Series Lighted Double-pole Rocker Switches

## Approvals

UL recognized, CSA certified. Load rating: 20A 125/250 VAC. 1 HP, 125/250 VAC. 14A 14VDC, VDE approval pending. Contacts: fine silver for long life dependability. Dielectric strength: 1250 volts (live parts to ground). Life: 35,000 operations at maximum rating. Insulation resistance: 5 megohms.

## Low Level Control

For low level/dry circuit applications (<100 am) contact factory for part number.

## High Inrush

125 Amp inrush capability.

## Terminals

Style A - 1/4-inch quick-connect

## Mechanical Features

100,000 mechanical operations

## Lamps

6, 12 and 28 volt incandescent lamps standard. 125 and 250 volt neon lamps standard.

## Special Lamps

Green neon 125 and 250 volt lamps. Consult factory.

## LED Display











LED display options available.

## Markings

Letters, numbers and symbols can be applied to rocker actuator or to integral nylon bezel; see inside back cover for details.


## Mounting

Snap-in type panel mounting for ease of installation without additional mounting hardware.

Circuit	Switching		
11	DPST Maintained Refer to Note 1		
44	DPST (Momentary) Normally Open Refer to Note 1		
110	DPST Maintained Independent Lamp		
111	DPST Maintained Furnished with the lamp internally connected to light when the actuator is pushed to on.		

**NOTE 1.** Furnished with one side of the lamp internally connected and a single lamp-terminal at the back of the switch.







## Ordering Information:

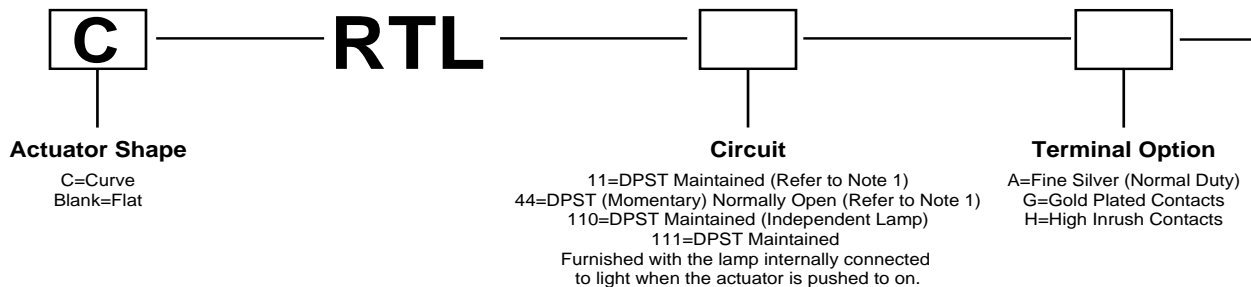

\*Green lenses require non-standard neon lamps for units with neon lamps.



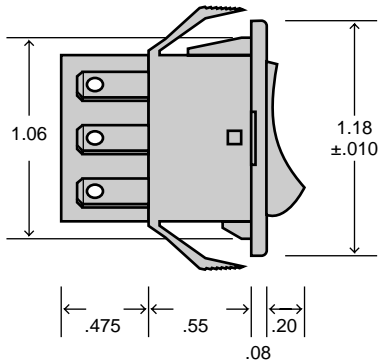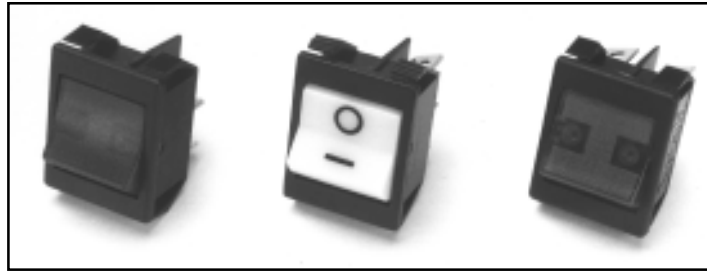Telephone (203) 272-2794 ● Fax (203) 272-3492



Panel Cut Out  
Panel Thickness 1/32" - 3/16"

**Lamp Voltage**

- 6V=6 Volt Incandescent
- 12V=12 Volt Incandescent
- 28V=28 Volt Incandescent
- 125V= 125 Volt Neon
- 250V=250 Volt Neon
- 125VG=125 Volt Green Neon
- 250VG=250 Volt Green Neon
- 6VR=6Volt Red LED
- 6VG=6 Volt Green LED
- 12VR=12 Volt Red LED
- 12VG=12 Volt Green LED

**Actuator Color**

- 1=Red
- 2=Clear
- 3=Amber
- 4=Green\*

**Housing Color**

- M9=Matte Black
- (For other colors contact factory)

**Accessories (Optional)**

- T=Boot
- B=Protective Barrier

