

Indicator Lights

Approvals


UL recognized, CSA certified. Dielectric strength: 1250 volts (live parts to ground). Life: 35,000 hours average rating. Insulation resistance: 5 megohms.

Lamps


6, 12 and 28 volt incandescent lamps standard.
125 and 250 volt neon lamps standard.

Markings


Letters, numbers and symbols can be applied to lens or to integral nylon bezel; see inside back cover for details.

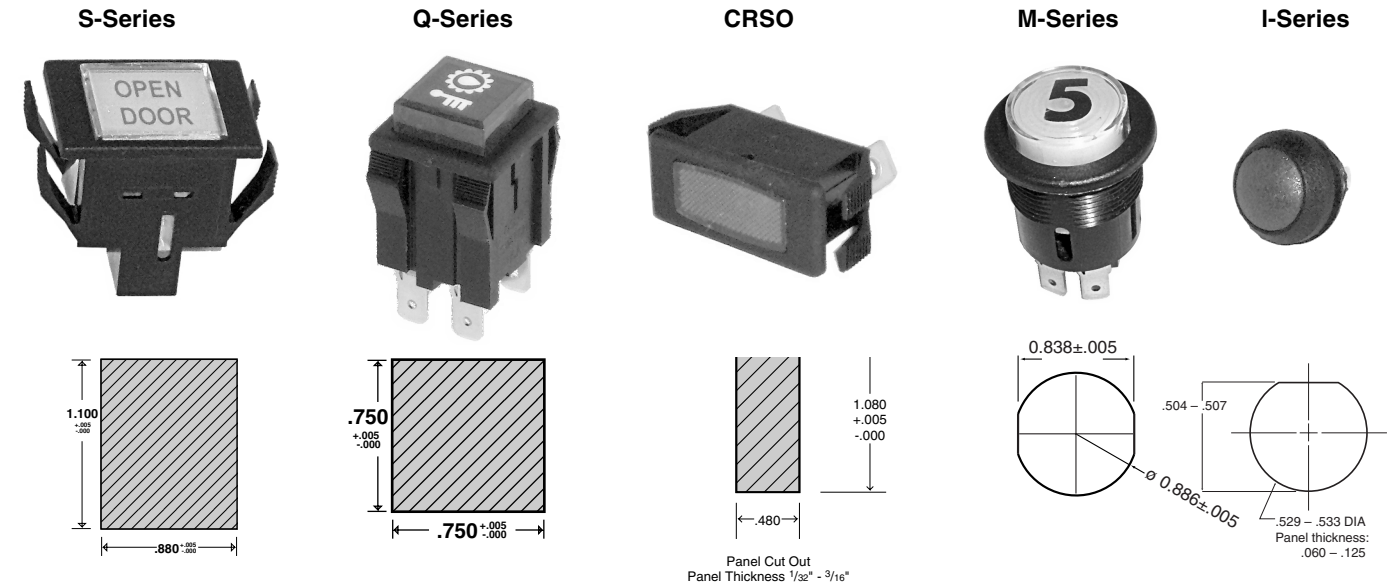

Ordering Information for S-Series, Q-Series and CRS-Series:

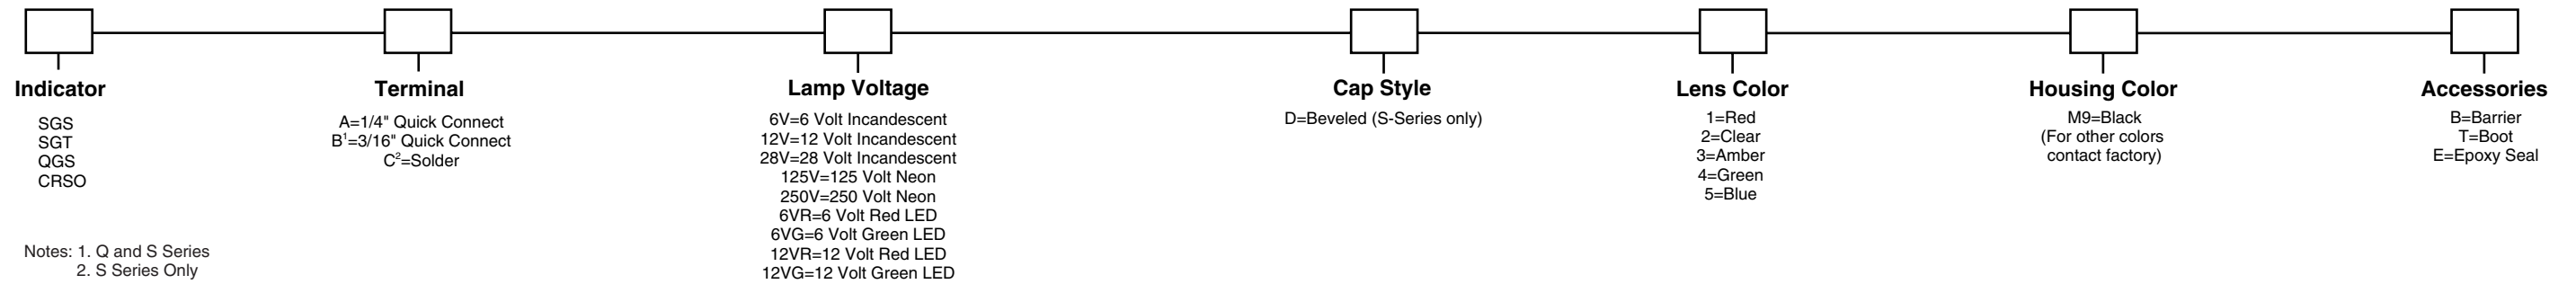

Ordering Information for M-Series:

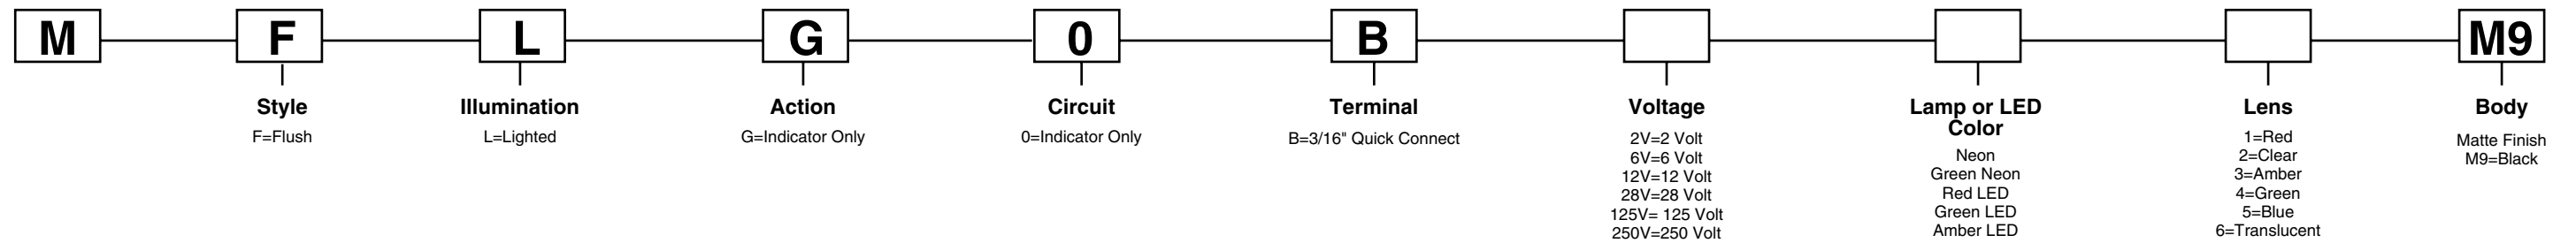

Ordering Information for L-Series:

