

The Smallest Switch/Circuit Breaker Yet!


This patented product combines control functions and overload protection in a single device to meet household or industrial requirements. Its one-piece design cuts down product assembly time. It is ideal for power strips, uninterrupted power supplies, office machines, machine tools and electrical appliances.

Rated Current:

8 Amp to 15 Amp are available on request

Voltage:

125 VAC or 250 VAC

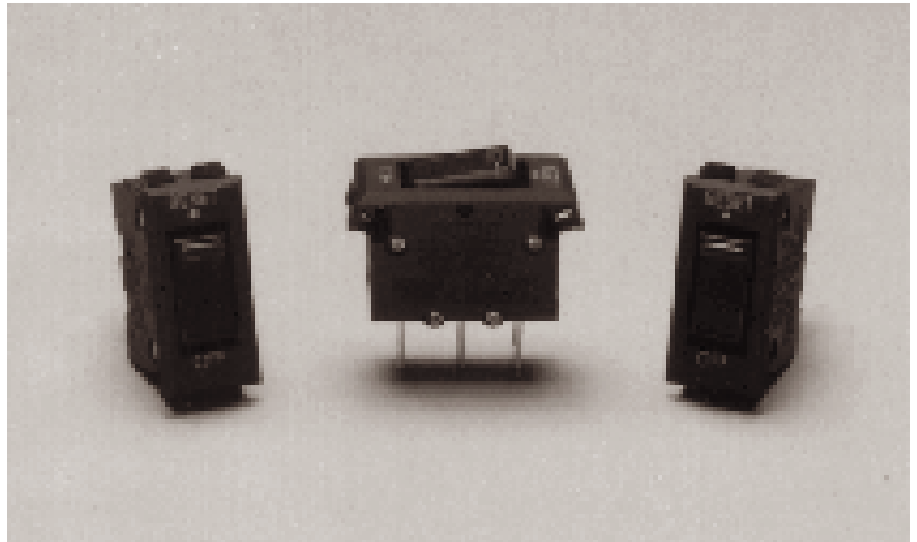

MOUNTING HOLE

0.526" ^{+0.008}/₀
13.35mm ^{+0.2}/₀

CIRCUIT DIAGRAM

THICKNESS	DIMENSION A
0.031" ~ 0.039" 0.8mm ~ 1.0mm	1.118" ^{+0.004} 28.4mm ^{+0.1}
0.043" ~ 0.055" 1.1mm ~ 1.4mm	1.134" ^{+0.004} 28.8mm ^{+0.1}
0.059" ~ 0.079" 1.5mm ~ 2.0mm	1.142" ^{+0.004} 29.0mm ^{+0.1}

Ordering Information: SS-001CB —
 S=Short Leg; L=Long Leg; LS=Short Leg w/ Lamp; LL=Long Leg w/Lamp



328 Industrial Avenue, Cheshire, CT 06410

Telephone (203) 272-2794 ● Fax (203) 272-3492